

Exova Warringtonfire
Holmesfield Road
Warrington
WA1 2DS
United Kingdom

T : +44 (0) 1925 655 116
F : +44 (0) 1925 655 419
E : warrington@exova.com
W: www.exova.com



Testing. Advising. Assuring.

Title:

CLASSIFICATION OF
REACTION TO FIRE
PERFORMANCE
IN ACCORDANCE WITH
EN 13501-1:2007+A1: 2009

Notified Body No:

0833

Product Names:

"Amtico Access"

Report No:

WF 339651

Issue No:

1

Prepared for:

Amtico International
Kingfield Road
Coventry
CV6 5AA

Date:

14th April 2014



0249

1. Introduction

This classification report defines the classification assigned to "Amtico Access", a PVC flooring, in accordance with the procedures given in EN 13501-1:2007+A1: 2009.

2. Details of classified product

2.1 General

The product "Amtico Access", a PVC flooring, is defined as being suitable for floor covering applications.

2.2 Product description

The product "Amtico Access", a PVC flooring, is fully described below and in the test reports provided in support of classification listed in Clause 3.1.

General description		Vinyl floorcovering which was tested loose laid over a particle board substrate	
Floorcovering	Product reference	"Amtico Access"	
	Name of manufacturer	Amtico International	
	Thickness	5.0mm (stated by sponsor) 4.9mm determined by Exova Warringtonfire)	
	Weight per unit area	7.8kg/m ² (stated by sponsor) 7.92kg/m ² (determined by Exova Warringtonfire)	
	Colour reference	"Frosted Oak"	
	Pattern reference	"SX5W2514"	
	Wear layer	Generic type	Plasticized vinyl
		Product reference	The sponsor has confirmed that no specific reference is used for this component
		Name of manufacturer	See Note 1 Below
		Thickness	0.55mm
		Weight per unit area	0.6kg/m ²
		Colour reference	See Note 1 Below
	Core	Flame retardant details	See Note 2 Below
		Generic type	Mineral filled plasticized vinyl
		Product reference	The sponsor has confirmed that no specific reference is used for this component
		Name of manufacturer	See Note 1 Below
		Thickness	3.45mm
		Weight per unit area	6.0kg/m ²
	Back ply	Colour reference	See Note 1 Below
		Flame retardant details	See Note 2 Below
Generic type		Plasticized vinyl	
Product reference		The sponsor has confirmed that no specific reference is used for this component	
Name of manufacturer		See Note 1 Below	
Thickness		1.0mm	
Weight per unit area	1.2kg/m ²		
Colour reference	See Note 1 Below		
Flame retardant details	See Note 2 Below		

Continued on next page

Substrate	Trade name	"Particle Board"
	Generic type	Particle board
	Name of supplier	SA Joinery
	Thickness	18mm
	Density	600kg/m ³
Brief description of manufacturing process		See Note 1 Below

Note 1: The sponsor was unwilling to provide this information.

Note 2: The sponsor of the test has confirmed that no flame retardant additives were utilised in the production of the component.

3. Test reports & test results in support of classification

3.1 Test reports

Name of Laboratory	Name of sponsor	Test reports/extended application report Nos.	Test method / extended application rules & date
Exova Warringtonfire	Amtico International	WF 339476	EN ISO 11925-2
Exova Warringtonfire	Amtico International	WF 339477	EN ISO 9239-1

3.2 Test results

Test method & test number	Parameter	No. tests	Results		
			Continuous parameter - mean (m)	Compliance with parameters	
EN ISO 9239-1	Critical flux	3	9.8	Compliant	
	Smoke		224.13	Compliant	
EN ISO 11925-2	15s exposure – surface of decorative face	6	F _s	Nil	Compliant
			Flaming droplets/ particles	None	Compliant
	15s exposure – edge of decorative face	6	F _s	41.7	Compliant
			Flaming droplets/ particles	None	Compliant

4. Classification and field of application

4.1 Reference of classification

This classification has been carried out in accordance with clause 9 of EN 13501-1:2007+A1:2009.

4.2 Classification

The product "Amtico Access", a PVC flooring, in relation to its reaction to fire behaviour is classified:

B_{FL}

The additional classification in relation to smoke production is:

s1

The format of the reaction to fire classification for floorings is:

Fire Behaviour		Smoke Production	
B_{FL}	-	s	1

i.e. **B_{FL} – s1**

Reaction to fire classification: B_{FL} – s1

4.3 Field of application

This classification is valid for the following end use applications:


- i) Flooring applications, used over any substrate with a density equal to or greater than 600Kg/m³, having a minimum thickness of 18mm and a fire performance of D-s2, d0 or better.
- ii) Installed with or without adhesive

This classification is also valid for the following product parameters:

Floorcovering thickness	No variation allowed
Floorcovering weight per unit area	No variation allowed
Floorcovering composition	No variation allowed
Floorcovering construction	No variation allowed
Floorcovering colour	Any colour / pattern

SIGNED

APPROVED

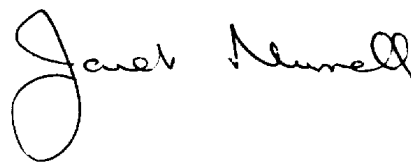

.....
Matthew Dale
Certification Engineer

.....
Janet Murrell
Technical Manager
on behalf of: **Exova Warringtonfire**

This copy has been produced from a .pdf format electronic file that has been provided by Exova Warringtonfire to the sponsor of the report and must only be reproduced in full. Extracts or abridgements of reports must not be published without permission of Exova Warringtonfire. The pdf copy supplied is the sole authentic version of this document. All pdf versions of this report bear authentic signatures of the responsible Exova Warringtonfire staff.